


LF Universal Tag (with hole)

Product Code: L12X171

Universal Tag is ideal for asset tracking in industrial & logistics application. It is available with different Chips & memory Sizes



Tag Dimensions

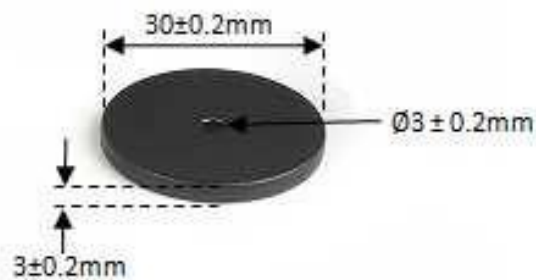

Electrical Specifications

Air Interface Protocol	ISO/IEC 11784/85, Read Only Mode
Operational Frequency**	125kHz (134.2kHz on request)
Chip**	EM4200
	128-bit laser programmed ROM (64- & 96-bit option available)
	Several options of data rate and data encoding <ul style="list-style-type: none">❖ Manchester 32 & 64 RF clock per bit❖ Bi phase 32 & 64 RF clock per bit❖ PSK 16 RF clock per bit❖ FSK2 50RF clock per bit
Read Range*	Up to 80 mm on GIS TS – RW 38 Plus reader
Operating temperature	-40°C to +80°C
Storage temperature	-40°C to +80°C
Ingress protection rating	IP66
Attachment***	Riveting/ Screw / Adhesive
Applicable surface	Metal, Wooden, Plastic

Physical and Mechanical Specification

Diameter	Ø 30 mm	Ø 25 mm	Ø 20 mm
Thickness	3.0 mm	3.0 mm	3.0 mm
Weight	2.0 gm	1.3 gm	1.0 gm
Hole Diameter	Ø 3.0 mm	Ø 3.0 mm	Without hole
Tag Code	L123171	L122171	L121171
Encasement	PC/ ABS		
Colour**	Black		
Quality Assurance	100% reader tested		

Chemical Resistance

Resistant to continuous exposure to salt water for 2 hours

Resistant to continuous exposure to motor oil for 2 hours

Additionally, abrasion resistant against HCL and IPA

Additional Services

Pre-encoding	On request
Customization***	Logo / text printing on request

Order Information

L12X171	With EM4200
L12X131	With EM4305
L12X055	With NXP HitagS 256

- * Actual read range may vary depending upon the reader
- ** Other on request
- *** Available as an option at extra cost

Omnia Technologies Pvt. Ltd.

Corporate Office

Plot No. 145, Udyog Vihar Phase 1, Gurugram, Haryana-122016, INDIA

Manufacturing Unit

Plot No. 68, Sector-5, IMT Manesar, Gurugram, Haryana-122050, INDIA | +91(124)4366174, 4366411,+91(124)4366410 (Fax)
