


UHF Micro Tag

Product Code: U3413623

Micro tag is the UHF mount on metal tag, which for its size provides unparallel performance. It offers new possibilities for companies to improve their Asset management, especially computers and other devices that contain variable information.




Tag Dimensions

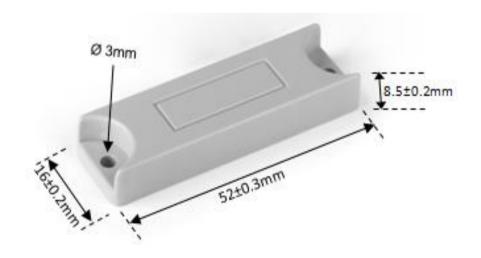

Electrical Specifications		
Air Interface Protocol	ISO/IEC 18000-6C, EPC Global C1G2	
Operational Frequency	865 – 868 MHz or 902 – 928 MHz	
Chip**	Alien Higgs 9	
Memory Configuration	EPC-96 bits up to 496 bits	
	TID – 48 bits unique	
	User memory – 688 bits	
	Access password – 32 bits	
	Kill password – 32 bits	
Read Range*	Up to 6.5 meters on Fixed reader with linear antenna	
Operating temperature	-40°C to +60°C	
Storage Temperature	-40°C to +80°C	
Ingress protection rating	IP67	
Attachment***	With Adhesive / Screwed / Rivet	
Applicable surface	On Metal	
Physical and Mec	hanical Specification	
Dimensions	52 x 16 x 8.5 ± 0.2 mm	
Colour**	Grey	
Weight	6 g	
Encasement	PC / ABS High Impact	
Quality Assurance	100% reader tested	
Chemical Resistar	<u>ice</u>	
Resistant to continuous exp	posure to salt water for 2 hours	
Resistant to continuous exp	posure to motor oil for 2 hours	
Additionally, abrasion resis	tant against HCL and IPA	

Linear Frequency Graph

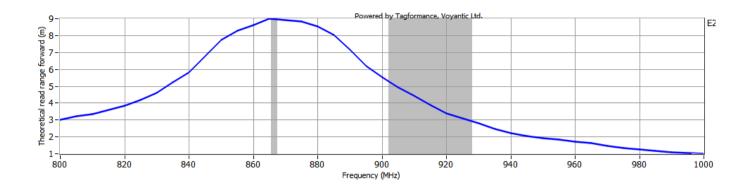

Additional Services

Pre-encoding	On request
Customization***	Logo / text printing on request

Order Information

U3413623M-EU	For on metal with Alien higgs-9 chip tuned at ETSI frequency
U3413623M-US	For on metal with Alien higgs-9 chip tuned at FCC frequency

* Actual read range may vary depending upon the reader

** Other on request

*** | Available as an option at extra cost

