

Manufacturer of RFID tags


UHF Metallica Tag

Product Code: U1011510

Metallica tag is the UHF Gen2 long range passive tag. It is ideal for harsh environment and gives excellent performance on metallic objects.



Tag Dimensions

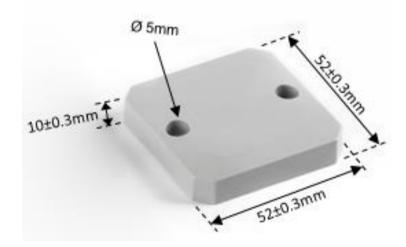


Electrical Specifications

Additionally, abrasion resistant against HCL and IPA

Air Interface Protocol	ISO/IEC 18000-6C, EPC Global C1G2	
Operational Frequency	865 – 868 MHz or 902 – 928 MHz	
Chip**	Alien Higgs-3	
Memory Configuration	EPC–96 bits, extendible to 480bits	
	TID – 96 bits unalterable unique	
	User memory – 512 bits	
	Access password – 32 bits	
	Kill password – 32 bits	
Read Range*	On metal – Up to 10m Fixed reader with linear antenna	
Operating temperature	-40°C to +80°C	
Storage temperature	-40°C to +80°C	
Ingress protection rating	IP67	
Attachment***	Riveting/Screw/Magnetic/Adhesive	
Applicable surface	Metal	
Physical and Mec	hanical Specification	
Dimensions	52 x 52 x 10 ± 0.2 mm	
Colour**	Grey	
Weight	25 g	
Encasement	ABS high Impact / PC	
Quality Assurance	100% reader tested	
Chemical Resistar	<u>ice</u>	
Resistant to continuous ex	posure to salt water for 2 hours	
Resistant to continuous ex	posure to motor oil for 2 hours	

Linear Frequency Graph

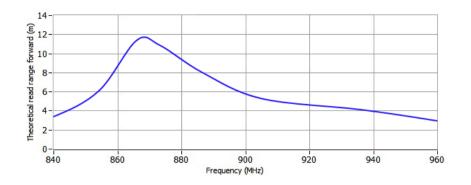

Additional Services

Pre-encoding	On request
Customization***	Logo / text printing on request

Order Information

U1011510-EU	Alien higgs-3 chip tuned at ETSI frequency
U1011510-US	Alien higgs-3 chip tuned at US frequency
U1011512-EU	Alien higgs-4 chip tuned at ETSI frequency
U1011512-US	Alien higgs-4 chip tuned at US frequency

- * Actual read range may vary depending upon the reader
- ** Other on request
- *** Available as an option at extra cost

